

Features

Honda GX160 Engine

You expect the best; you get the best. The GX160 lives up to the reputation of superior reliability and performance you expect from Honda.

Low Oil Protection

In the event there is low oil level, the engine will shut down, and protect the engine from damage.

Powder Coat Paint

For an incredibly durable finish.

Sturdy Wrap-Around Welded Tubular Cradle

We use 14 gauge steel for dependable durability.

Oversized Generator End



We oversized the generator end to improve small motor starting.

100% Load Tested

You won't find statistical sampling here. We load test every generator before it leaves our facility.

DYNA PROFESSIONAL

3,000 Starting Watts
2,500 Running Watts

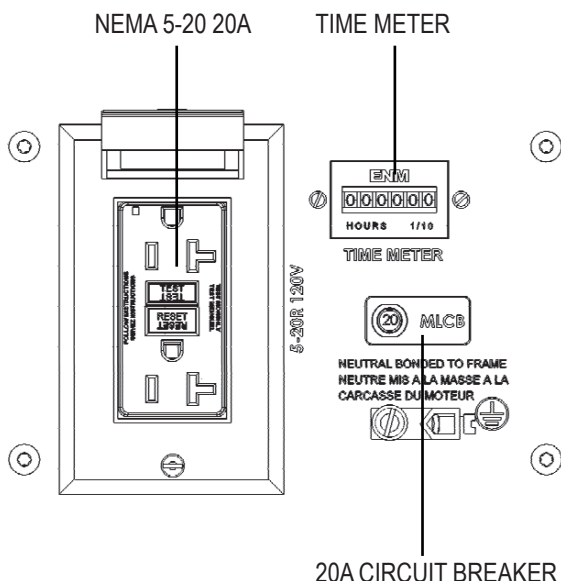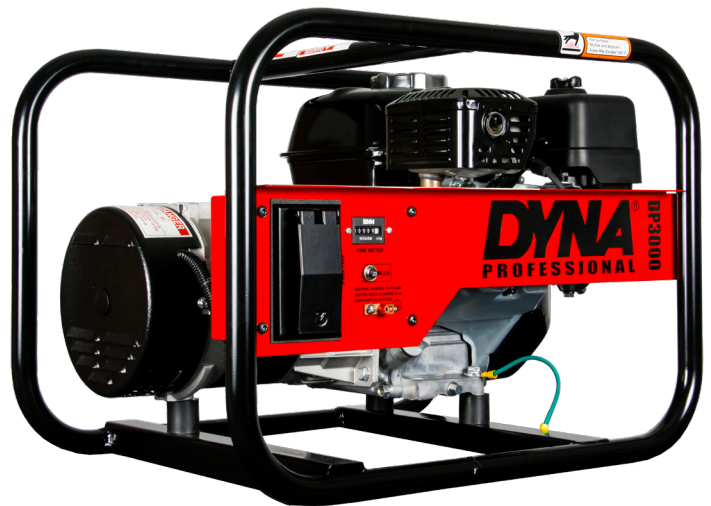

Optional Accessories

Plug-In Line Voltage Monitor

For when you want to verify the voltage output.

Maintenance Kit

Keep the engine at its peak performance to ensure the generator will be ready when needed most.

DP3000

STARTING WATTS	3,000
RUNNING WATTS	2,500
RUNNING AMPS @120 VAC	20.8
VOLTAGE REGULATION	CAPACITOR +/-5%
FREQUENCY REGULATION	+/-3%
MAIN CIRCUIT BREAKER	20 AMP
BONDED NEUTRAL	YES
120 VOLT RECEPTACLES	NEMA 5-20 20A (GFCI)
GENERATOR WARRANTY ⁽¹⁾	3 YRS COMMERCIAL

NOTES: (1) For generator warranty information contact your local WINCO dealer.

GENSET

MOTOR STARTING (CODE G) ⁽¹⁾	1 HP
SOUND DATA ⁽²⁾ FULL LOAD	74
LIFTING EYE	NO
PROTECTIVE ROLL FRAME	14 GAUGE STEEL
ASSEMBLED IN	USA
EPA APPROVED	YES
CARB APPROVED	YES
CSA APPROVED	NO
UNIT WARRANTY ⁽³⁾	3 YRS COMMERCIAL

NOTES: (1) Code G capacitor start motor. (2) All measurements are in db(a). Tested at 7 meters (23 ft.). (3) For more generator warranty information contact your local WINCO dealer.

ENGINE

ENGINE BRAND	HONDA
ENGINE MODEL	GX160 OHV
ENGINE STARTER	RECOIL
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	SINGLE
DISPLACEMENT/TYPE	160 CC / OHV
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL	10W-30
OIL CAPACITY ⁽¹⁾	0.6 QT
FUEL TANK	1 GAL
FUEL GAUGE	NO
FULL LOAD RUN TIME	2.2 HRS/GAL
TIME METER	YES
ENGINE WARRANTY ⁽³⁾	3 YRS COMMERCIAL

NOTES: (1) The recommended oil is for normal applications. See operator's manual for the recommended oil for your needs. (2) Code G capacitor start motor. (3) Contact your local Honda service center for engine warranty assistance.

DIMENSIONS


DIMENSIONS	22.5" x 16.5" x 16.5"
NET WEIGHT	96 LBS

NOTES: Dimensions are L x W x H

SHIPPING

SHIPPING DIMENSIONS	24" x 18" x 19"
SHIP WEIGHT	104 LBS
FREIGHT CLASS	70

NOTES: Dimensions are L x W x H

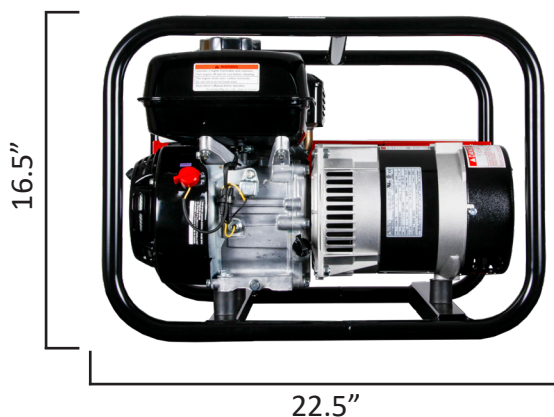

Specifications are subject to change without notice.