

# WINCO®

# W3000H

## Features

### **Honda GC160 engine**

You expect the best; you get the best. The Honda GC160 provides the longevity you expect from Honda.

### **Low oil protection**

In the event there is low oil pressure, the engine will shut down, and protect the engine from damage.

### **Powder coat paint**

For an incredibly durable finish.

### **Light weight**

When you need a Lil' helping hand on your worksite, at 68 lbs. the W3000H is easily carried.

### **EPA approved fuel tank**

Equipped with an EPA approved plastic fuel tank.


### **100% load tested**

You won't find statistical sampling here. We load test every generator before it leaves our facility.

## **INDUSTRIAL** *Lil' Dog*

**3,000 Surge Watts**

**2,400 Continuous Watts**

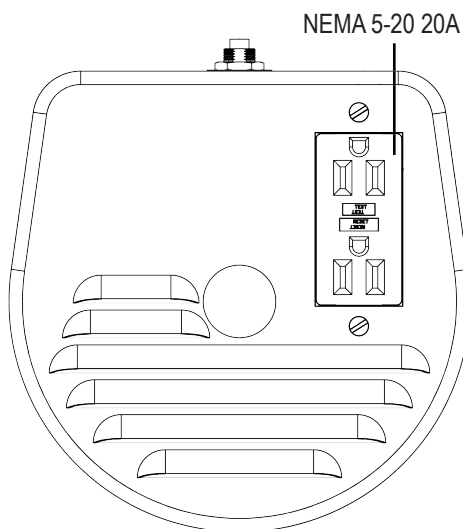

## **Optional Accessories**

### **Plug-in line voltage monitor**

For when you want to verify the voltage output.

### **Maintenance Kit**

Keep the engine at its peak performance to ensure the generator will be ready when needed most.

## GENERATOR

|                                   |                          |
|-----------------------------------|--------------------------|
| SURGE WATTS                       | 3,000                    |
| CONTINUOUS WATTS                  | 2,400                    |
| CONTINUOUS AMPS                   | 20                       |
| OUTPUT                            | 120 VAC                  |
| VOLTAGE REGULATION                | CAPACITOR +/-5%          |
| FREQUENCY REGULATION              | +/-3%                    |
| MAIN CIRCUIT BREAKER              | 20 AMP                   |
| NEUTRAL BONDED                    | YES                      |
| 120 VOLT RECEPTACLES              | (2) NEMA 5-20 20A (GFCI) |
| LIFTING EYE                       | YES                      |
| GENERATOR WARRANTY <sup>(1)</sup> | 1 YR COMMERCIAL          |

NOTES: (1) For generator warranty information contact your local WINCO service center.

## SHIPPING

|                     |                          |
|---------------------|--------------------------|
| DIMENSIONS (LxWxH)  | 22.15" x 14.67" x 16.23" |
| NET WEIGHT          | 68 LBS                   |
| SHIPPING DIMENSIONS | 25" x 19" x 19"          |
| SHIP WEIGHT         | 72 LBS                   |
| FREIGHT CLASS       | 70                       |

## ENGINE

|                                        |                 |
|----------------------------------------|-----------------|
| ENGINE BRAND                           | HONDA           |
| ENGINE MODEL                           | GC160 OHC       |
| ENGINE STARTER                         | RECOIL          |
| ENGINE SPEED                           | 3600 RPM        |
| ENGINE CYLINDERS                       | SINGLE          |
| DISPLACEMENT/TYPE                      | 160 CC / OHV    |
| LOW OIL PROTECTION                     | STANDARD        |
| RECOMMENDED OIL                        | 10W-30          |
| OIL CAPACITY <sup>(1)</sup>            | .61 QT          |
| dBA AT 7 METERS                        | 72              |
| FUEL TANK                              | 2 QT            |
| FUEL GAUGE                             | NO              |
| HALF LOAD RUN TIME                     | 1.5 HOURS       |
| HOURLY METER                           | NO              |
| MOTOR STARTING (CODE G) <sup>(2)</sup> | .75 HP          |
| EPA APPROVED                           | YES             |
| CARB APPROVED                          | YES             |
| CSA APPROVED                           | NO              |
| UL LISTED                              | NO              |
| BATTERY SIZE <sup>(3)</sup>            | NOT REQUIRED    |
| ENGINE WARRANTY <sup>(4)</sup>         | 1 YR COMMERCIAL |

NOTES: (1) The recommended oil is for normal applications. See operator's manual for the recommended oil for your needs. (2) Code G capacitor start motor. (3) Battery not included (4) Contact your local Honda service center for engine warranty assistance.

