

W03383

3650 / 3300 WATT REMOTE START
INVERTER PORTABLE GENERATOR
EPA CARB AND cETL CERTIFIED

FIRMAN[®]
POWER EQUIPMENT

8644 W. LUDLOW DR.
PEORIA, AZ 85381
1-844-347-6261

WWW.FIRMANPOWEREQUIPMENT.COM

UPC // 840876133835

STARTING WATTS // 3650

RUNNING WATTS // 3300

VOLTAGE // 120V

FREQUENCY // 60Hz

ENGINE TYPE // OHV

STARTING SYSTEM // REMOTE / ELECTRIC / RECOIL

FUEL TANK VOLUME // 1.8 GAL

RUN-TIME // UP TO 8 HRS (@25% LOAD)

DECIBLES // 58 dB (@7m @25% LOAD)

CARTON L×W×H // 26.6" × 18.9" × 19.3"

GROSS WEIGHT // 104 LBS.

UNIT WEIGHT // 91 LBS.

UNITS PER PALLET // 8 / 12 / 16

UNITS PER CONTAINER // 400 / 40HQ



CONTROL PANEL

(2) 5-20R 20A-120V

(1) TT-30R 30A-120V RV READY

(1) DC OUTLET 8.3A-12V

(1) USB OUTLET 2.1A-5V

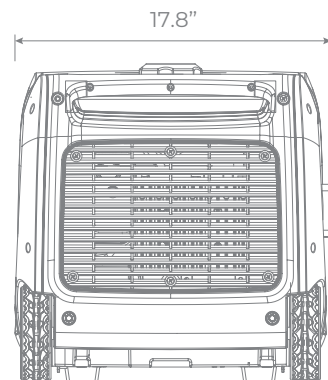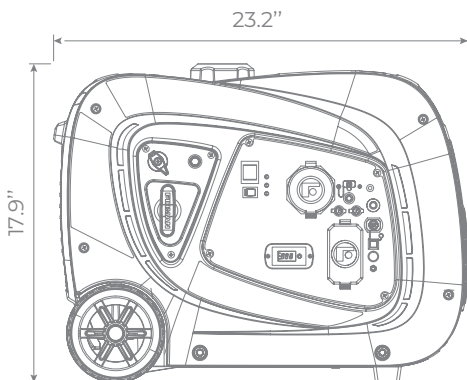

BEST USED FOR



W3650iR

Parallel Capable
Cepaz Paralelo
Capable parallele



3650
3300

Control panel area including a fuel tank cap, a red emergency stop button, and a yellow handle with the FIRMAN logo.

Main control panel featuring a red power switch, a digital display, a large black AC outlet, and various smaller outlets and indicators.

FIRMAN

